
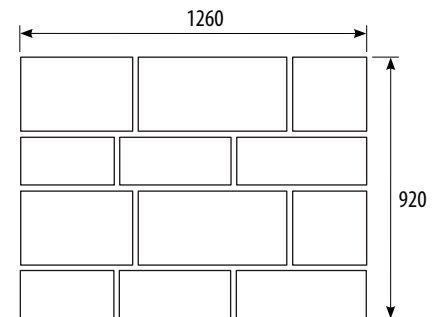


TECHNICAL INFORMATION

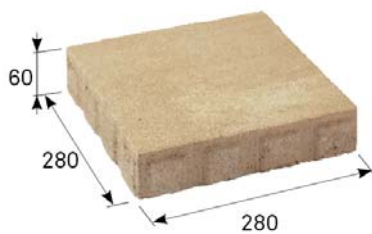

Layout dimensions, set of 6 types of stones, example of 2 stones

Indicative composition of stones on the layer

name	layout dimensions (mm)			Number of pieces on the layer	quantity (m ²)		weight (kg)			max. tonnage up to 24 t	
	height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m ²
BEST ARNICA 	60	420	280	2	1.16	11.6	149	1490	1520	15	174
	60	560	280	2							
	60	280	280	2							
	60	350	180	2							
	60	420	180	2							
	60	490	180	2							

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height			
60 mm	ČSN EN 1339	±2 mm	±3 mm	≥ 5 MPa	≥ 40	≤ 1.0 kg/m ² after 100 cycles


EXPLANATIONS OF PICTOGRAMS

Paving designed for sidewalks, bicycle paths and non-motorized traffic.


Surface relief

Facet mini

SURFACE FINISHES AND COLOURS




COLORMIX ETNA



COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX SAND

surface	characteristics	colour
RELIEF	shaped surface with natural roughness, where the visible layer is formed by the height differences between the different levels of the stone	colormix etna, colormix arabica, colormix brilant, colormix sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 layer; the stones cannot be delivered individually and it is not possible to determine the ratio of stones in the composition. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Caution: BEST ARNICA paving is not intended for vehicle travel; we do not recommend compacting with a vibrating plate.



703/2020

