


TECHNICAL INFORMATION

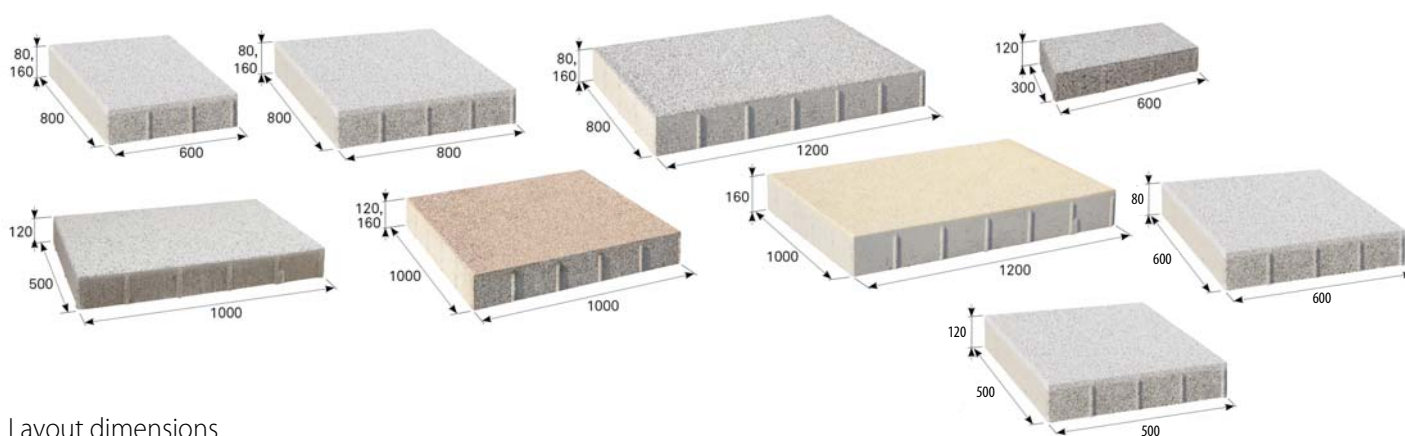

Layout dimensions

| name | layout dimensions (mm) | | | quantity on layer | | quantity on pallet | | consumption | weight (kg) | | | max. tonnage up to 24 t | |
|--------------------------|------------------------|--------|-------|-------------------|----------------|--------------------|----------------|--------------------|-------------|--------|-----------------|-------------------------|----------------|
| | height | length | width | pcs | m ² | pcs | m ² | pcs/m ² | pcs | pallet | pallet included | pcs of pallets | m ² |
| BEST GIGANTIC | 80 | 600 | 600 | 2 | 0.72 | 18 | 6.48 | 2.78 | 70 | 1260 | 1298 | 18 | 324 |
| | 80 | 800 | 600 | 2 | 0.96 | 18 | 8.64 | 2.08 | 95 | 1710 | 1748 | 13 | 234 |
| | 80 | 800 | 800 | 1 | 0.64 | 10 | 6.40 | 1.56 | 130 | 1300 | 1338 | 18 | 180 |
| | 80 | 1200 | 800 | 1 | 0.96 | 8 | 7.68 | 1.04 | 205 | 1640 | 1678 | 14 | 112 |
| BEST GIGANTIC | 120 | 600 | 300 | 6 | 1.08 | 30 | 5.40 | 5.56 | 57 | 1710 | 1748 | 13 | 390 |
| | 120 | 500 | 500 | 4 | 1.00 | 24 | 6.00 | 4.00 | 79 | 1896 | 1934 | 12 | 288 |
| | 120 | 1000 | 500 | 2 | 1.00 | 12 | 6.00 | 2.00 | 158 | 1896 | 1934 | 12 | 144 |
| | 120 | 1000 | 1000 | 1 | 1.00 | 6 | 6.00 | 1.00 | 315 | 1890 | 1928 | 12 | 72 |
| BEST GIGANTIC | 160 | 800 | 600 | 2 | 0.96 | 10 | 4.80 | 2.08 | 190 | 1900 | 1938 | 12 | 120 |
| | 160 | 800 | 800 | 1 | 0.64 | 5 | 3.20 | 1.56 | 260 | 1300 | 1338 | 18 | 90 |
| | 160 | 1200 | 800 | 1 | 0.96 | 4 | 3.84 | 1.04 | 410 | 1640 | 1678 | 14 | 56 |
| | 160 | 1000 | 1000 | 1 | 1.00 | 4 | 4.00 | 1.00 | 420 | 1680 | 1718 | 13 | 52 |
| | 160 | 1200 | 1000 | 1 | 1.20 | 4 | 4.80 | 0.83 | 470 | 1880 | 1918 | 12 | 48 |

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t with occasional movement over 3.5 t (garbage trucks, supply).



Paving designed for the movement of motor vehicles over 3.5 t. This paving is intended for roads according to ČSN 73 6101, ČSN 73 6110, TP 170, TP 192 for design level of violation D1 and D2, expected traffic load classes IV-VI.



Surface basic



Surface Metropol



Facet classic

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

| product height | production standard | maximum deviation from declared production dimensions | | deviations from flatness and curvature | | | bending strength | skid/slip resistance | ČSN 73 1326, weather resistance, method A |
|----------------|---------------------|---|--------|--|----------------|----------------|------------------|----------------------|---|
| | | width and length | height | length of gauge | max. convexity | max. concavity | | | |
| 80 mm | ČSN EN 1339 | ±5 mm | ±3 mm | 500 mm | 2.5 mm | 1.5 mm | ≥ 5 MPa | satisfactory | ≤ 1.0 kg/m ² after 100 cycles |
| 120 mm | ČSN EN 1339 | ±5 mm | ±3 mm | 500/800 mm | 2.5/4.0 mm | 1.5/2.5 mm | ≥ 5 MPa | satisfactory | ≤ 1.0 kg/m ² after 100 cycles |
| 160 mm | ČSN EN 1339 | ±5 mm | ±3 mm | 800 mm | 4.0 mm | 2.5 mm | ≥ 5 MPa | satisfactory | ≤ 1.0 kg/m ² after 100 cycles |

SURFACE FINISHES AND COLOURS



COLORMIX ARABICA




COLORMIX BRILANT



COLORMIX ETNA



COLORMIX SAND



NATURAL



WHITE



ANTHRACITE

| surface | characteristics | colour |
|----------|---|---------------------------------------|
| STANDARD | standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving | colormix arabica, brilant, etna, sand |
| METROPOL | blast-treated surface, produced according to a special recipe using coloured grits | natural, white, anthracite |

GENERAL INFORMATION

Large-format two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz). For handling and laying, we recommend using a vacuum lifting device with adequate load capacity. To simplify laying, the corresponding spacers can be used (also in the BEST range).

Caution: BEST GIGANTIC paving with a height of 80 mm is recommended to be compacted with a vibrating plate with a plastic pad weighing no more than 170-200 kg with a set centrifugal force of 20-30 kN; paving with a height of 120 and 160 mm must be compacted with a vibrating plate with a plastic pad weighing no more than 350 kg.



703/2020

