


TECHNICAL INFORMATION

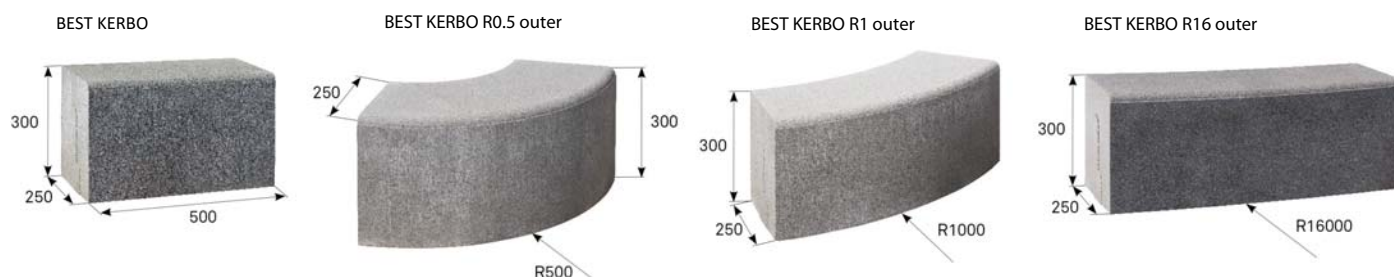

Layout dimensions

name		layout dimensions (mm)			quantity (pcs)		weight (kg)			max. tonnage up to 24 t	
		height	length	width	layer	pallet	pcs	pallet	pallet included	pcs of pallets	pcs
BEST KERBO		300	500	250	6	18	80	1440	1470	16	288
BEST KERBO R0.5 outer		300	length of outer curve 780	250	3	9	96	864	894	24	216
BEST KERBO R1 outer		300		250	3	9	113	1017	1047	22	198
BEST KERBO R16 outer		300		250	3	9	128	1152	1182	20	180

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	product width	production standard	maximum deviation from declared production dimensions		bending tensile strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
			width and height	length			
300 mm	250 mm	ČSN EN 1340	±3 % (min. 3 mm, max. 5 mm)	max. ±1 %	≥ 3.5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS




Road curb



Surface basic

SURFACE FINISHES AND COLOURS



NATURAL

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural

GENERAL INFORMATION

Two-layer vibrated curb with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The curb has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Use: BEST KERBO road curbs are suitable for the edges of traffic areas, especially in towns and villages.

