




TECHNICAL INFORMATION

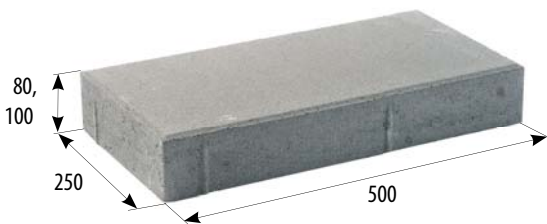

Layout dimensions

name		layout dimensions (mm)			consumption (pcs/lm)	quantity (pcs)		weight (kg)			max. tonnage up to 24 t	
		height	length	width		layer	pallet	pcs	pallet	pallet included	number of pallets	m ²
BEST NAVIGA I		80	500	250	2/4	6	60	23	1380	1410	17	1020
BEST NAVIGA I		100	500	250	2/4	6	48	29	1392	1422	16	768

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

name	height	production standard	maximum deviation from declared production dimensions				bending tensile strength	bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
			width and length	width and height	height	length				
BEST NAVIGA I	80 mm	ČSN EN 1339	±5 mm	x	±3 mm	x	x	≥ 5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles
BEST NAVIGA I	100 mm	ČSN EN 1339	±5 mm	x	±3 mm	x	x	≥ 5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving intended for sidewalks, bicycle paths, parking spaces and movement of motor vehicles up to 3.5 t with occasional movement over 3.5 t (garbage trucks, supply).




Paving designed for the movement of motor vehicles over 3.5 t. This paving is intended for roads according to ČSN 73 6101, ČSN 73 6110, TP 170, TP 192 for design level of violation D1 and D2, expected traffic load classes IV-VI.



Surface basic

SURFACE FINISHES AND COLOURS



NATURAL

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The curb has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

Use: BEST NAVIGA is designed as a guide strip to be placed along the curbs forming part of the road.

