



TECHNICAL INFORMATION

Examples of stones no. 1, 2 and 4

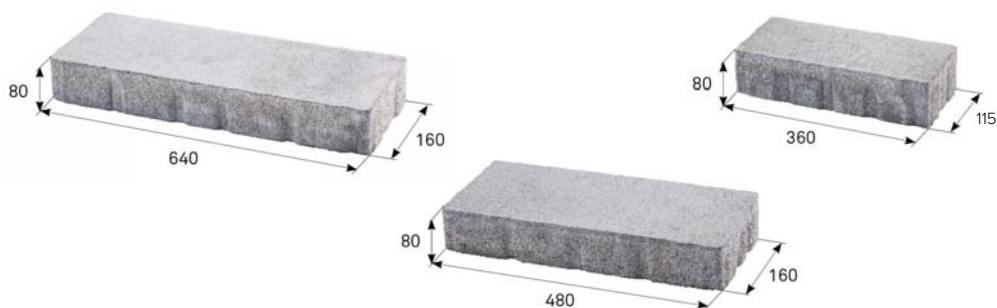

Layout dimensions, set of 5 types of stones

Indicative composition of stones on the layer

name	layout dimensions (mm)			indicative number of pieces on the layer	quantity (m ²)		weight (kg)			max. tonnage up to 24 t		
	height	length	width		layer	pallet	layer	pallet	pallet included	pcs of pallets	m ²	
	stone no. 1	80	640	160	3	0.92	9.20	156	1560	1598	15	138.00
	stone no. 2	80	480	160	3							
	stone no. 3	80	280	115	3							
	stone no. 4	80	360	115	3							
	stone no. 5	80	480	115	3							

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		deviations from flatness and curvature			transverse tensile strength	bending strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
		width and length	height	length of gauge	max. convexity	max. concavity				
80 mm	ČSN EN 1339	±5 mm	±3 mm	500 mm	2.5 mm	1.5 mm	x	≥ 5 MPa	≥ 40	≤ 1.0 kg/m ² after 100 cycles
80 mm (stone no. 3)	ČSN EN 1338	±2 mm	±3 mm	x	x	x	≥ 3.6 MPa	x	≥ 40	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS



Paving designed for sidewalks, bicycle paths and non-motorized traffic.




Surface basic




Facet mini

SURFACE FINISHES AND COLOURS




NATURAL




COLORMIX ARABICA



COLORMIX BRILANT



COLORMIX ETNA



COLORMIX SAND

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, colormix arabica, brilant, etna, sand

GENERAL INFORMATION

Two-layer vibrated paving with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The paving has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 layer; the stones cannot be delivered individually and it is not possible to determine the ratio of stones in the composition. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz). If the subfloor is properly made, it is possible to use this paving for occasional movement of cars up to 3.5 t.

Caution: BEST OLYMPIA paving must be compacted with a vibrating plate with a plastic pad weighing no more than 50 kg.



703/2020

