




TECHNICAL INFORMATION

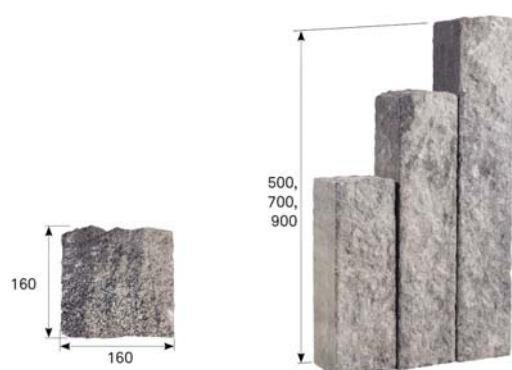

name	manufacturing dimensions (mm)			consumption (pcs/lm)	quantity (pcs/pallet)	weight (kg)			max. tonnage up to 24 tonnes		note
	height	length	width			pcs	pallet	including pallet	pcs of pallets	pcs	
BEST PALISADE STONE	500	160	160	6.25	40	33.5	1340	1378	17	680	without inner cavity
	700	160	160	6.25	25	47.0	1175	1213	19	475	without inner cavity
	900	160	160	6.25	25	60.5	1513	1551	15	375	without inner cavity

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	production standard	maximum deviation from declared production dimensions		bending strength
		width and length	height	
500	PN-BEST-09-2009/A	±5 mm	max. ±3 % of height	≥ 3.5 MPa
700	PN-BEST-09-2009/A	±5 mm	max. ±3 % of height	≥ 3.5 MPa
900	PN-BEST-09-2009/A	±5 mm	max. ±3 % of height	≥ 3.5 MPa

EXPLANATIONS OF PICTOGRAMS




Surface chipped

SURFACE FINISHES AND COLOURS



COLORMIX BRILANT



COLORMIX SAND

surface	characteristics	colour
CHIPPED	individual concrete blocks are split using the jaws of the splitter	colormix brilant, colormix sand


GENERAL INFORMATION

Two-layer vibrated element with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The palisade has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.


The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).

conicity of palisades according to their height, temporary wedging

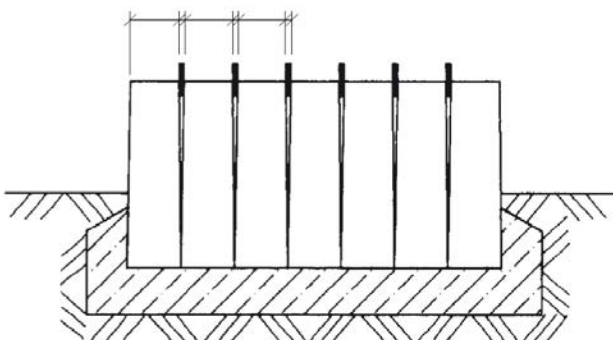

- the conical shape of the palisades must be respected when fitting them, which results from the technological necessity of their manufacture
- it is advisable to secure the even and vertical fitting of the palisades by means of temporary wedging

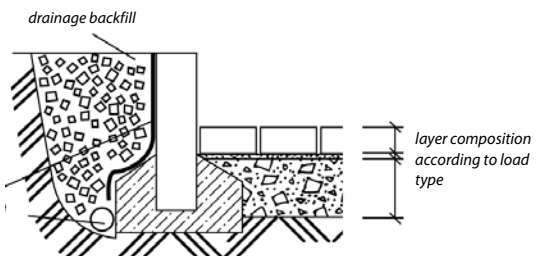

example of the use of insulation foil and drainage hose

diagram of the outdoor staircase made of paving and palisades

