





TECHNICAL INFORMATION

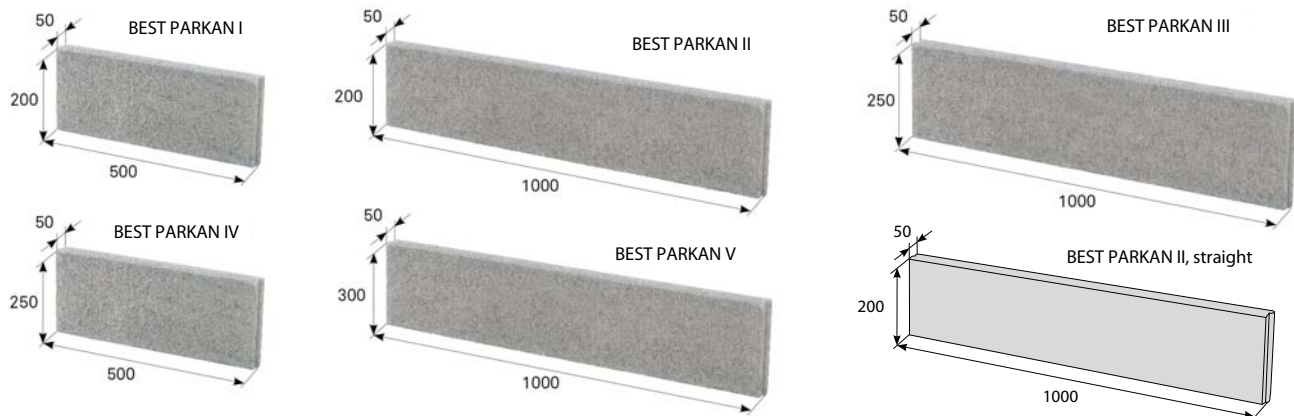

Layout dimensions

name		layout dimensions (mm)			consumption (pcs/lm)	quantity (pcs)		weight (kg)			max. tonnage up to 24 tonnes	
		height	length	width		layer	pallet	pcs	pallet	pallet included	pcs of pallets	pcs
BEST PARKAN I		200	500	50	2	30	90	11	990	1020	23	2070
BEST PARKAN II		200	1000	50	1	15	45	21	945	975	24	1080
BEST PARKAN II, straight		200	1000	50	1	15	45	21	945	975	24	1080
BEST PARKAN III		250	1000	50	1	15	45	26.3	1184	1214	19	855
BEST PARKAN IV		250	500	50	2	30	90	13	1170	1200	20	1800
BEST PARKAN V		300	1000	50	1	12	24	34	816	846	24	576

We are holders of the Gold Certificate for complete certification according to ISO 9001, ISO 14001, ISO 50001, ISO 45001. Our products are manufactured and inspected pursuant to European harmonized standards.

product height	product width	production standard	maximum deviation from declared production dimensions		bending tensile strength	skid/slip resistance	ČSN 73 1326, weather resistance, method A
			width and height	length			
300 mm, 250 mm, 200 mm	50 mm	ČSN EN 1340	±3 % (min. 3 mm, max. 5 mm)	max. ±1 %	≥ 3.5 MPa	satisfactory	≤ 1.0 kg/m ² after 100 cycles

EXPLANATIONS OF PICTOGRAMS




Garden curb



Surface basic

SURFACE FINISHES AND COLOURS



NATURAL



RED



CARAMEL



SANDSTONE



ANTHRACITE

surface	characteristics	colour
STANDARD	standard surface with natural aggregate roughness corresponding to the visible layer of concrete paving	natural, red, caramel, sandstone, anthracite

GENERAL INFORMATION

Two-layer vibrated curb with high strength, frost resistance, surface resistance to water and chemical de-icing agents. The curb has low abrasion and good adhesion properties. BEST concrete elements are permanently impregnated against contamination.

The minimum shipping quantity is 1 piece. The goods are loaded on marked pallets BEST (30 kg) or BEST large (38 kg) according to the production capacity of individual plants.

When laying, it is important to follow the correct procedure according to the instructions for use (www.best.cz).



703/2020

